

INDUS: Effective and Efficient Language Models for Scientific Applications

Bishwaranjan Bhattacharjee¹, Aashka Trivedi¹, Masayasu Muraoka¹,
Muthukumaran Ramasubramanian³, Takuma Udagawa¹, Iksha Gurung³, Rong Zhang¹,
Bharath Dandala¹, Rahul Ramachandran², Manil Maskey², Kaylin Bugbee², Mike Little⁴,
Elizabeth Fancher², Lauren Sanders⁵, Sylvain Costes⁵, Sergi Blanco-Cuaresma⁶, Kelly Lockhart⁶,
Thomas Allen⁶, Felix Grezes⁶, Megan Ansdell⁷, Alberto Accomazzi⁶, Yousef El-Kurdi¹,
Davis Wertheimer¹, Birgit Pfitzmann¹, Cesar Berrospi Ramis¹, Michele Dolfi¹, Rafael Teixeira de Lima¹,
Panagiotis Vagenas¹, S. Karthik Mukkavilli¹, Peter Staar¹, Sanaz Vahidinia⁷, Ryan McGranaghan⁸,
Armin Mehrabian⁹, Tsendgar Lee⁷

¹IBM Research AI, ²NASA MFSC, ³UAH, ⁴Navteca, ⁵NASA Ames, ⁶Harvard-Smithsonian CfA,
⁷NASA HQ, ⁸JPL, ⁹NASA GSFC

Abstract

Large language models (LLMs) trained on general domain corpora showed remarkable results on natural language processing (NLP) tasks. However, previous research demonstrated LLMs trained using domain-focused corpora perform better on specialized tasks. Inspired by this pivotal insight, we developed INDUS, a comprehensive suite of LLMs tailored for the Earth science, biology, physics, heliophysics, planetary sciences and astrophysics domains and trained using curated scientific corpora drawn from diverse data sources. The suite of models include: (1) an encoder model trained using domain-specific vocabulary and corpora to address natural language understanding tasks, (2) a contrastive-learning-based general text embedding model trained using a diverse set of datasets drawn from multiple sources to address information retrieval tasks and (3) smaller versions of these models created using knowledge distillation techniques to address applications which have latency or resource constraints. We also created three new scientific benchmark datasets namely, CLIMATE-CHANGE NER (entity-recognition), NASA-QA (extractive QA) and NASA-IR (IR) to accelerate research in these multi-disciplinary fields. Finally, we show that our models outperform both general-purpose encoders (ROBERTa) and existing domain-specific encoders (SCIBERT) on these new tasks as well as existing benchmark tasks in the domains of interest.

1 Introduction

Large language models (LLMs) trained on huge amounts of data have demonstrated impressive capabilities on natural language understanding and

generation tasks. Most popular LLMs rely on the transformer architecture (Vaswani et al., 2017) and are trained using general-purpose corpora like Wikipedia or CommonCrawl (Devlin et al., 2019; Liu et al., 2019; Lewis et al., 2020; Raffel et al., 2020; Brown et al., 2020; Touvron et al., 2023). Although these general-purpose models exhibited strong performance, the distributional shift of vocabulary led to sub-optimal performance on domain-specific natural language understanding and generation tasks (Beltagy et al., 2019). Following this observation, several domain-specific LLMs such as SCIBERT (Beltagy et al., 2019), BIOBERT (Lee et al., 2019), MATBERT (Walker et al., 2021), BATTERYBERT (Huang and Cole, 2022) and SCHOLARBERT (Hong et al., 2023) were developed with the goal of improving accuracy on in-domain NLP tasks (Lee et al., 2019; Araci, 2019; Wu et al., 2023).

In this research, we specifically focused on interdisciplinary fields related to the Earth, celestial bodies, the Sun, and planets within our solar system such as physics, Earth science, astrophysics, heliophysics, planetary sciences and biology. While the training corpora of existing domain-specific models such as SCIBERT, BIOBERT and SCHOLARBERT partially cover some of these fields, there is currently no specific model available that encompasses all of the fields of interest collectively. Further, the interdisciplinary nature of these domains of interest is reflected in a vast body of literature scattered across diverse sources. Thus, we developed INDUS, a collection of encoder-based LLMs focused on these domains of interest (Figure 1) trained using meticulously curated corpora from diverse sources. We believe this work will facilitate research organizations and enterprises working in these fields by providing efficient access to relevant literature and

Contact: bhatta@us.ibm.com, aashka.trivedi@ibm.com, muthukumaranr17@gmail.com, rahul.ramachandran@nasa.gov

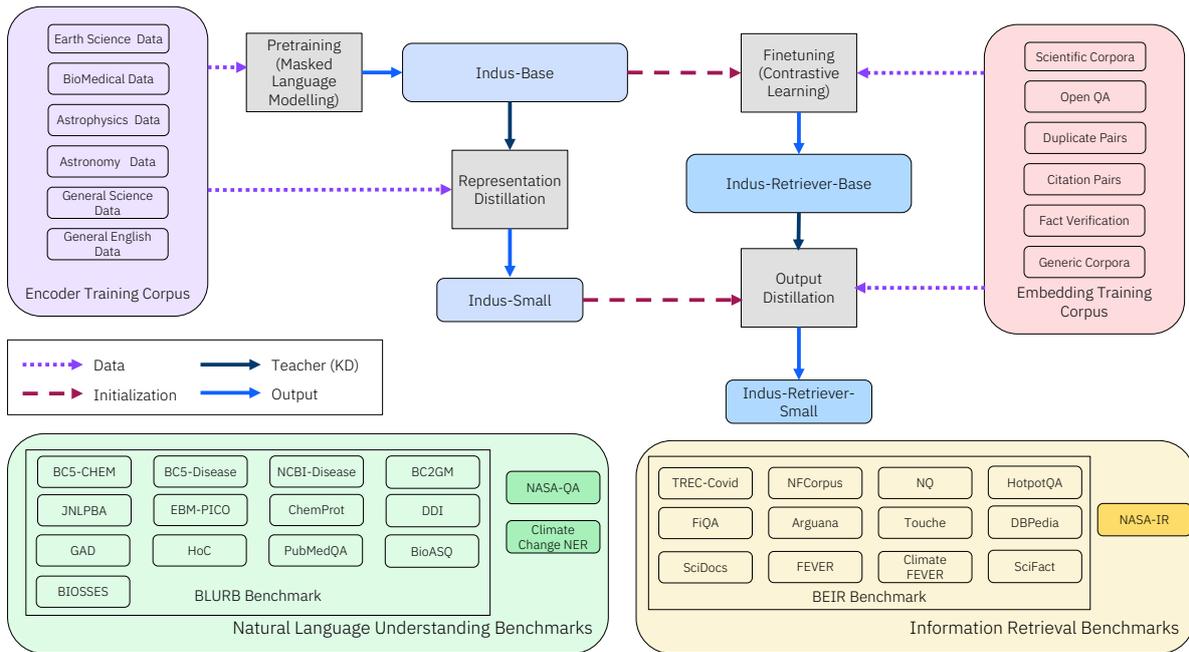


Figure 1: Overview of INDUS models: the general-purpose encoder model and the retriever built from it, and their distilled counterparts. Also shown are the benchmarks used for evaluation, highlighting our new benchmarks, NASA-QA, CLIMATE-CHANGE NER and NASA-IR.

enabling them in informed decision-making.

Specifically, we make the following contributions:

1. Utilizing the byte-pair encoding algorithm, we constructed INDUSBPE, a customized tokenizer from the curated scientific corpus.
2. We pretrained multiple **encoder-only LLMs** using the curated scientific corpora and the INDUSBPE tokenizer (§2, §3). We further created **sentence-embedding models** by fine-tuning the encoder-only models with a contrastive learning objective to learn “universal” sentence embeddings (Gao et al., 2021) (§4). We also trained **smaller, more efficient versions** of these models using knowledge-distillation techniques (§3.3, §4.2).
3. We created **three new scientific benchmark datasets**, CLIMATE-CHANGE NER (an entity recognition task), NASA-QA (an extractive question answering task) and NASA-IR (a retrieval task) (§5) to further accelerate research in this multi-disciplinary field.
4. Through experimental results, we show strong performance by our models on these benchmark tasks as well as on existing domain-specific benchmarks, outperforming general-purpose models like ROBERTa (Liu et al., 2019) as well as scientific-domain encoders like SCIBERT

(Beltagy et al., 2019). We also show that the knowledge-distilled models achieved a significant boost in latency while maintaining strong empirical performance compared to the original models on most of the benchmark tasks.

2 Data

Sufficient high-quality in-domain corpora is essential to develop models that perform better than their counterparts trained on open-domain corpora. We meticulously identified corpora for each of the aforementioned domains, and created English-only models for the sake of containment. Specifically, for each of the domains, we used open-source data which has a permissive license, and further augmented them with specific data from NASA and its data providers. To aid in the learning of general English, we also included English Wikipedia in our training corpora. We briefly describe each data source below, and present statistics of the data in Table 1.

- **SAO/NASA Astrophysics Data System (ADS)**¹: ADS is the biggest source of data, covering publications in the areas of astronomy and astrophysics, physics and general science including all arXiv e-prints.

¹<https://ui.adsabs.harvard.edu>

Dataset	Domain	#Tokens	Ratio
NASA CMR	Earth Science	0.3B	1%
AMS and AGU papers	Earth Science	2.8B	4%
English Wikipedia	General	5.0B	8%
PubMed Abstracts	Biomedical	6.9B	10%
PMC	Biomedical	18.5B	28%
SAO/NASA ADS	Astronomy, Astrophysics, Physics, General Science	32.7B	49%
Total		66.2B	100%

Table 1: Basic statistics of our pretraining dataset.

- **PubMed Central (PMC)²**: PMC is a full-text archive of biomedical and life science journal literature maintained by National Library of Medicine and National Institutes of Health. We used the portion of PMC that has a commercial-friendly license, along with the PubMed abstracts of all the articles in PMC.
- **American Meteorological Society (AMS)³**: We used full-text journal documents spanning topics in Earth systems, Earth interactions, applied meteorology and climatology, physical oceanography, atmospheric sciences, climate, hydrometeorology, weather and forecasting, and societal impacts.
- **American Geophysical Union (AGU)⁴**: The AGU dataset included journal documents across the topics of atmospheres, biogeosciences, Earth surface, machine learning and computation, oceans, planets, solid earth, and space physics.
- **NASA Common Metadata Repository (CMR)⁵**: CMR is a high-performance, high-quality, continuously evolving metadata system that catalogs all data and service metadata records for NASA’s Earth Science Data and Information System (ESDIS). It contains text descriptions of the NASA Earth science data products.

3 Methodology: Encoder Models

3.1 INDUSBPE Tokenizer

We trained BPE tokenizer (Radford et al., 2019), INDUSBPE from scratch using a subset of our train-

²<https://www.ncbi.nlm.nih.gov/pmc>

³<https://www.ametsoc.org/index.cfm/ams/publications/>

⁴<https://agupubs.onlinelibrary.wiley.com/>

⁵<https://www.earthdata.nasa.gov/eosdis/science-system-description/eosdis-components/cmr>

Tokenizer	ADS	PMC	Wikipedia
ROBERTa	12,867,439	7,549,075	15,859
+lower_cased	12,862,227	7,557,868	16,901
INDUSBPE	12,309,023	6,920,659	16,056

Table 2: Number of tokens produced by ROBERTa and INDUSBPE tokenizers applied to 1k samples from each dataset. Fewer tokens lead to a smaller computation cost.

ing dataset (§2)⁶. For a fair comparison, we set the vocabulary size to 50,265, which is equal to that of the ROBERTa tokenizer (Liu et al., 2019) and used the uncased variation of both the tokenizers.

We performed a brief analysis to understand the differences between the vocabularies of INDUSBPE and the ROBERTa tokenizer. Out of 50,265 tokens, 22,355(44.5%) tokens are common in both the tokenizers while the remaining 27,910(55.5%) tokens are included only in either tokenizer, indicating a significant distributional shift in domain. To further understand the effect, we applied both ROBERTa and INDUSBPE on 1,000 randomly sampled text fragments from our datasets. These text fragments varied from full documents to abstracts to single sentences. As shown in Table 2, INDUSBPE tokenizer produced fewer tokens than the ROBERTa tokenizer, leading to 8% drop in computation cost during training.

Table 3 compares the ROBERTa tokenizer and INDUSBPE tokenizer, illustrating that the proposed tokenizer treated scientific terms (such as biomarkers, phosphorylated, alzheimer) as single tokens while ROBERTa tokenizer splits these words into multiple subword pieces.

3.2 Encoder Model

We first trained an encoder-only model, INDUS_{BASE}, using a masked language modeling objective. The model architecture follows ROBERTa_{BASE} (Liu et al., 2019), which consists of 12 layers and has 125M parameters. We adopted the default hyperparameters⁷ but with an effective batch size of 92,16. We trained the model for 500K steps using 192 V100 GPUs.

3.3 Knowledge Distillation for Efficient Encoder Model

We also trained a smaller model, INDUS_{SMALL}, with 38M parameters through knowledge distillation

⁶We used HF tokenizers, <https://github.com/huggingface/tokenizers>

⁷We refer readers to Table 9 in (Liu et al., 2019).

Input text
novel tau biomarkers phosphorylated at t181, t217 or t231 rise in the initial stages of the preclinical alzheimer’s continuum when only subtle changes in a pathology are detected
Tokenization by ROBERTa
<s> no vel t au biomark ers phosph ory lated at t 181 , t 217 , or t 231 rise in the initial stages of the preclinical al z heimer ’ s continuum when only subtle changes in a pathology are detected </s>
Tokenization by INDUSBPE
<s> novel tau biomarkers phosphorylated at t 181 , t 217 , or t 231 rise in the initial stages of the preclinical alzheimer ’ s continuum when only subtle changes in a pathology are detected </s>

Table 3: Tokenization comparison between ROBERTa and our tokenizers. Input text adapted from Suárez-Calvet et al. (2020).

techniques by using $\text{INDUS}_{\text{BASE}}$ as the teacher. $\text{INDUS}_{\text{SMALL}}$ follows a 4-layer architecture recommended by the Neural Architecture Search engine (Trivedi et al., 2023) with an optimal trade-off between performance and latency. We adopted the distillation objective proposed in MiniLMv2 (Wang et al., 2021) to transfer fine-grained self-attention relations, which has been shown to be the current state-of-the-art (Udagawa et al., 2023). Using this objective, we trained the model for 500K steps with an effective batch size of 480 on 30 V100 GPUs.

4 Methodology: Sentence Embedding Models

4.1 Sentence Embedding Model

Text embeddings represent text as low-dimensional vectors, allowing for efficient use in dense retrieval systems, where relevant passages for a given query are identified on the basis of the similarity between their embeddings (Karpukhin et al., 2020).

Contrastive Learning Objective Sentence embedding models trained using a contrastive learning objective (Khosla et al., 2020; Gao et al., 2021) pushes the embeddings of a query closer to that of a relevant passage and further away from that of a non-relevant passage.

Inspired by recent work (Li et al., 2023), we used an improved contrastive loss by introducing an additional bidirectional signal. Specifically, for a triple $\{q, p^+, P^-\}$ of a query, a relevant (positive) passage, and a set of non-relevant (negative) passages $P^- = \{p_j^-\}_{j=1}^m$, We define the InfoNCE loss (van den Oord et al., 2019) as:

$$\mathcal{L}_{IC} = -\frac{1}{n} \sum_{i=1}^n \log \frac{e^{s(q_i, p_i^+)}}{Z_i} \quad (1)$$

$$Z_i = \sum_j e^{s(q_i, p_j)} + \sum_j e^{s(q_i, p_i)} + \sum_{j \neq i} e^{s(q_i, q_j)} + \sum_{j \neq i} e^{s(p_i, p_j)} \quad (2)$$

where $s(q, p)$ is a measure of temperature-scaled cosine similarity between the embeddings of query and a passage measured by:

$$s(q, p) = \frac{1}{\tau} \frac{\mathbf{E}(q) \cdot \mathbf{E}(p)}{\|\mathbf{E}(q)\| \|\mathbf{E}(p)\|} \quad (3)$$

Training Data Similar to prior work (Wang et al., 2022; Li et al., 2023; Xiao et al., 2023), we employed a stage-wise training approach for our sentence embedding model:

1. Unsupervised training: we first trained on a large corpus of 300 million samples of naturally occurring pairs collected from internet sources, such as Wikipedia, StackExchange, etc. We also included scientific data from PubMed, PMC (§2), Arxiv and S2ORC (Lo et al., 2020) as in-domain data for our science-oriented retriever model. Furthermore, we created a domain-specific dataset from the ADS data (§2) by including title-abstract pairs.
2. Supervised fine-tuning: we further trained on high-quality annotated datasets, such as NQ (Kwiatkowski et al., 2019), SQUAD (Rajpurkar et al., 2016), SPECTER pairs (Cohan et al., 2020), etc. We included the aforementioned ADS data and a sample of the S2ORC data in this step, to boost domain-specific signals.

Appendix A contains comprehensive details about the datasets used in training. For both training stages, we used large batch sizes and in-batch negatives to better approximate the contrastive learning objective. During training, we sampled batches from each data source proportionately to its size, similar to Li et al. (2023).

Model Specifications We created our sentence embedding model by fine-tuning $\text{INDUS}_{\text{BASE}}$. Hereafter, we refer to the resulting retriever model as $\text{INDUS-RETRIEVER}_{\text{BASE}}$. We followed a bi-encoder framework (Reimers and Gurevych, 2019), and experimented with multiple pooling strategies and found that the mean pooling of the contextualized transformer representations performed the best.

Training Details We trained each stage on 2 A100 GPUs with an effective batch size of 1,024. We first trained with unsupervised data for 300K steps followed by an additional 100K steps with the supervised data. We used a learning rate of $2e - 5$ during both these steps.

4.2 Knowledge Distillation for Embedding Models

To optimize the latency for retrieval applications, we also created a small retriever model with the aim to transfer the capability of the large teacher model ($\text{INDUS-RETRIEVER}_{\text{BASE}}$) to smaller student model ($\text{INDUS}_{\text{SMALL}}$), by distilling the teacher’s distribution of similarity scores. Furthermore, we find that it is necessary to modify the training strategy for distillation, as described below.

Distillation Loss We used knowledge distillation techniques introduced in (Xu et al., 2023). Specifically, for a sentence x_i and its corresponding in-batch element pairs $\{x_i, x_j\}_{j=1, j \neq i}^m$, we minimized the cross entropy between the teacher’s distribution p_t of similarity scores between pairs and the student’s distribution, p_s . Following Hinton et al. (2014), we also scaled the output distribution of both teacher and student by a temperature, τ_{KD} :

$$\mathcal{L}_{KD} = - \sum_{i=1}^n \sum_{j=1}^m p_t(x_i, x_j) \log p_s(x_i, x_j) \quad (4)$$

$$p_s(x_i, x_j) = \frac{e^{s_s(x_i, x_j)/\tau_{KD}}}{\sum_{k=1}^m e^{s_s(x_i, x_k)/\tau_{KD}}} \quad (5)$$

$$p_t(x_i, x_j) = \frac{e^{s_t(x_i, x_j)/\tau_{KD}}}{\sum_{k=1}^m e^{s_t(x_i, x_k)/\tau_{KD}}} \quad (6)$$

Here, $s_s(x_i, x_j)$ and $s_t(x_i, x_j)$ represent the similarity scores between two pairs $\{x_i, x_j\}$, defined in Equation 3 for the student and teacher respectively.

Training Data We first conducted an embedding-oriented pretraining step, as presented in RetroMAE (Xiao et al., 2022), on English Wikipedia, BooksCorpus, and StackExchange data, totalling

approximately 56M sentences. This masked auto-encoder model consisted of a full encoder along with a shallow decoder. The model uses masked language modeling with a training objective to recover the original sentence based on the decoder’s masked input and the sentence embedding generated from the encoder’s masked input, via masked language modelling. There is no distillation loss contributing to this step, which can be viewed as an extended pretraining mechanism. We find that the RetroMAE pretraining does not give us good gains in the larger model but improves the performance of the smaller model.

For distilling the sentence embedding model, we found that a stage-wise training approach does not benefit performance as much as in the non-distillation case (ablation presented in Appendix B). We thus distilled in a single step with all the data described in §4.1 and Appendix A and added labelled pairs from FEVER (Thorne et al., 2018) and HOTPOTQA (Yang et al., 2018).

Model Specifications We built the sentence embedding model by distilling into $\text{INDUS}_{\text{SMALL}}$. This is a 4-layer model with an embedding dimension of 576. We refer to the resulting retriever model as $\text{INDUS-RETRIEVER}_{\text{SMALL}}$. It follows a bi-encoder framework, and here we find that using the vector representation of the first token as the embedding (CLS pooling) gives better performance than using mean pooling.

Training Details For the Retro-MAE style pretraining (Xiao et al., 2022), we trained on 8 A100 GPUs with an effective batch size of 128 for 2 epochs with a learning rate of $2e - 5$. For the stage-wise distillation, we trained on 2 A100 GPUs for 300K steps with an effective batch size of 2,048, and learning rate of $7e - 4$. Through experimentation, We found that $\tau_{KD} = 4$ performed the best.

5 Creating Benchmarks

Benchmark datasets play a crucial role in assessing the language understanding capabilities models. However, to the best of our knowledge, there is a noticeable absence of datasets tailored for the diverse and multidisciplinary field under study. Thus, to effectively benchmark the proposed NLP models and further accelerate research in this multidisciplinary domain, We introduced three new datasets, an NER task, a QA task, and an IR task, described below.

	Train	Validation	Test
Num. Abstracts	382	77	75
Num. Tokens	32,031	6,443	5,850
Entity Labels	<i>climate-nature, climate-greenhouse-gases, climate-assets, climate-problem-origins, climate-mitigations, climate-properties, climate-impacts, climate-datasets, climate-organizations, climate-observations, climate-models, climate-hazards, climate-organisms</i>		

Table 4: CLIMATE-CHANGE NER statistics and entity labels

5.1 CLIMATE-CHANGE NER

While traditional search engines and databases offer some assistance in exploring data related to climate change, the complexity of climate-related queries often requires more sophisticated natural language processing techniques. This necessity is underscored by the extensive array of climate models, datasets, and organizations involved, which demand meticulous curation and continuous updates. While databases like those maintained by NASA or the UN provide valuable observational data, comprehensive overviews of climate models and impact assessments are scarce and not easily accessible.

In order to bridge this gap, we introduced a comprehensive dataset for developing and evaluating NLP models tailored towards understanding and addressing climate-related topics across various domains. Specifically, we created a new manually annotated dataset CLIMATE-CHANGE NER⁸, in which the named entities of interest originate from complex taxonomies used in climate-related literature. This dataset comprises 534 abstracts sourced from Semantic Scholar Academic Graph (Kinney et al., 2023), collected using a seed set of climate-related keywords such as *wildfire* or *floods*. The abstracts were annotated using the IOB (inside, outside, beginning) tagging scheme and encompasses a diverse array of entity types, as shown in Table 4.

5.2 NASA-QA

We present NASA-QA⁹, an extractive question answering task focused on the Earth science domain. First, 39 paragraphs from Earth science papers which appeared in AGU and AMS journals (§2) were sourced. Subject matter experts from NASA formulated questions and marked the corresponding

⁸<https://huggingface.co/datasets/ibm/Climate-Change-NER>

⁹<https://huggingface.co/datasets/nasa-impact/nasa-smd-qa-benchmark>

spans of the paragraph which answer the questions. We used 29 paragraphs (with 145 QA pairs in total) as the training set and the remaining 10 paragraphs (with 50 questions in total) as the evaluation set. The training set was further augmented with paragraphs and QA pairs related to Earth science from the SQuAD dataset (Rajpurkar et al., 2018). Specifically, those related to oxygen, Amazon rain forest and geology were used. This resulted in a pruned SQuAD set comprising 686 paragraphs with 5,081 questions (2,817 answerable and 2,264 unanswerable). We evaluated the performance of the models by augmenting these SQuAD pairs to the training data sourced from Earth science papers, while keeping the evaluation set intact.

5.3 NASA-IR

We introduced a domain-specific information retrieval benchmark, NASA-IR¹⁰, spanning almost 500 question-answer pairs related to the Earth science, planetary science, heliophysics, astrophysics and biological physical sciences domains. Specifically, we sampled a set of 166 paragraphs from AGU, AMS, ADS, PMC and Pubmed (§2) and manually annotated with 3 questions that are answerable from each of these paragraphs, resulting in 498 questions. We used 398 of these questions as the training set and the remaining 100 as the validation set. To comprehensively evaluate the information retrieval systems and mimic the real world data, We combined 26,839 random ADS abstracts with these annotated paragraphs. On an average, each query is 12 words long, and each paragraph is 120 words long. We used Recall@10 as evaluation metric since each question has only one relevant document.

6 Experimental Results

Baselines We compared INDUS models against open source models of similar sizes:

- INDUS_{BASE} was compared to ROBERTA_{BASE}¹¹ and SCIBERT¹².
- INDUS_{SMALL} was compared to MINILM (6-layer)¹³ and TINYBERT (4-layer)¹⁴.

¹⁰<https://huggingface.co/datasets/nasa-impact/nasa-smd-IR-benchmark>

¹¹<https://huggingface.co/FacebookAI/roberta-base>

¹²https://huggingface.co/allenai/scibert_scivocab_uncased

¹³<https://huggingface.co/nreimers/MiniLM-L6-H384-uncased>

¹⁴https://huggingface.co/huawei-noah/TinyBERT_General_4L_312D

Task	Metric	Dataset	Base model (125M params.)			Small model (~30M params.)		
			ROBERTa	SCIBERT	INDUS _{BASE}	TINYBERT	MINILM	INDUS _{SMALL}
NER	Entity F1	BC5-chem	90.3 (0.2)	91.4 (0.2)	<u>93.3</u> (0.2)	84.6 (0.2)	86.1 (0.3)	90.7 (0.1)
		BC5-disease	81.5 (0.3)	83.7 (0.3)	<u>85.2</u> (0.3)	74.0 (0.4)	77.4 (0.3)	81.3 (0.3)
		NCBI-disease	87.6 (0.6)	87.6 (0.4)	88.3 (0.4)	81.2 (0.4)	83.1 (0.5)	85.6 (0.6)
		BC2GM	82.1 (0.3)	82.3 (0.2)	<u>84.0</u> (0.3)	74.7 (0.4)	77.1 (0.2)	79.7 (0.3)
		JNLPBA	79.1 (0.2)	78.2 (0.2)	<u>80.3</u> (0.2)	70.3 (0.2)	73.4 (0.3)	75.7 (0.2)
PICO	Macro F1	EBM PICO	72.3 (0.3)	72.4 (0.3)	73.1 (0.2)	67.4 (0.2)	70.3 (0.1)	73.1 (0.2)
Relation Extraction	Micro F1	ChemProt	50.4 (28.2)	73.9 (0.7)	<u>76.9</u> (0.5)	56.2 (3.2)	55.9 (2.1)	71.7 (0.9)
		DDI	78.6 (1.5)	80.1 (1.0)	81.7 (0.5)	39.3 (5.3)	51.5 (2.9)	69.0 (1.2)
		GAD	80.0 (1.1)	81.6 (1.2)	79.4 (5.6)	76.4 (1.3)	77.3 (1.0)	81.3 (0.7)
Document Classification	Micro F1	HoC	82.2 (0.7)	83.1 (0.6)	83.7 (0.5)	41.6 (6.8)	62.8 (4.7)	80.2 (0.6)
Question Answering	Accuracy	PubMedQA	53.1 (3.3)	54.3 (3.8)	58.2 (6.7)	50.3 (1.4)	51.6 (1.7)	56.1 (1.4)
		BioASQ	69.1 (4.8)	74.6 (4.5)	69.6 (5.8)	74.3 (3.6)	66.7 (2.3)	75.4 (3.3)
Sentence Similarity	Pearson	BIOSESSES	79.8 (6.3)	86.3 (3.5)	72.2 (9.5)	88.2 (1.1)	26.6 (8.7)	70.4 (3.3)
Micro Average	-	-	75.9 (3.7)	79.2 (1.3)	78.9 (2.4)	67.6 (1.9)	66.1 (1.9)	76.2 (1.0)
Macro Average	-	-	74.9 (3.7)	78.2 (1.6)	76.4 (3.2)	65.6 (2.4)	60.6 (3.0)	74.3 (1.3)

Table 5: Evaluation results on BLURB. Results reported are averaged on 10 random seeds with standard deviation in parenthesis. Micro average is reported across datasets while macro average is computed by first averaging scores on each task (say, task average), followed by averaging the task average across tasks. Results in bold indicate highest performance while underlined results indicate significant difference from second highest result by more than two standard deviations in each model size.

- INDUS-RETRIEVER_{BASE} was compared to BGE_{BASE}¹⁵ and a ROBERTa_{BASE} model finetuned with the same method presented in §4.1.
- INDUS-RETRIEVER_{SMALL} was compared to MINILM-v2¹⁶ and BGE_{SMALL}¹⁷.

6.1 Natural Language Understanding Benchmarks

We evaluated our models on BLURB (Gu et al., 2021), a benchmark suite for natural language understanding and reasoning tasks in the biomedical domain. We followed the original work to compute the overall score (i.e., macro average).

Table 5 shows the evaluation results. Among base models, INDUS_{BASE} significantly outperforms the general-purpose ROBERTa model on micro/macro average while achieving competitive performance to the bio-domain-specific counterpart, SCIBERT.

As for smaller models, we noticed INDUS_{SMALL} outperformed the baselines, TINYBERT and MINILM, by a large margin in most cases, showing significant difference from second best models in NER, PICO, relation extraction, and document classification tasks. This demonstrates the effectiveness of knowledge distillation from our domain-specific teacher model, INDUS_{BASE}.

¹⁵<https://huggingface.co/BAAI/bge-base-en-v1.5>

¹⁶[sentence-transformers/all-MiniLM-L6-v2](https://huggingface.co/all-MiniLM-L6-v2)

¹⁷<https://huggingface.co/BAAI/bge-small-en-v1.5>

Model	F1 (SD)
ROBERTa	60.8 (0.8)
SCIBERT	61.8 (0.7)
INDUS _{BASE}	64.0 (1.0)
TINYBERT	34.3 (1.6)
MINILM	44.7 (1.3)
INDUS _{SMALL}	54.8 (0.8)

Table 6: CLIMATE-CHANGE NER benchmark results. Standard deviation over 10 random seeds shown in parenthesis. Results in bold and underline indicate highest performance and significant difference from second highest result by more than two standard deviations in each model size, respectively.

We also noticed SCIBERT tends to perform better than our model on paired input-text tasks, such as QA and semantic similarity tasks, although the results have relatively large standard deviations. We hypothesized that the additional next sentence prediction objective during training in BERT-style models (such as SCIBERT) in contrast to the ROBERTa-style models (such as ROBERTa_{BASE} and INDUS) may be beneficial for paired input-text tasks. This trend was consistent with the observations of Tinn et al. (2023).

6.2 CLIMATE-CHANGE NER

As shown in Table 6, our models clearly outperformed the corresponding baseline models on the CLIMATE-CHANGE NER task, suggesting the effec-

tiveness of training on large domain-specific data.

6.3 NASA-QA

As mentioned in §5, we augmented the training set with relevant SQuAD pairs for fine-tuning. All models are fine tuned for 15 epochs, and the results are shown in Table 7. We observed that $INDUS_{BASE}$ outperformed all models of similar sizes, while $INDUS_{SMALL}$ had relatively strong performance compared to its counterparts.

Model	F1 (SD)
ROBERTa	66.8 (3.1)
SCIBERT	63.5 (1.9)
$INDUS_{BASE}$	68.2 (2.9)
TINYBERT	43.2 (2.3)
MINILM	<u>59.2</u> (3.9)
$INDUS_{SMALL}$	47.4 (1.8)

Table 7: NASA-QA benchmark results. Standard deviation over 3 random seeds shown in parenthesis. Results in bold and underline indicate highest performance and significant difference from second highest result by more than two standard deviations in each model size, respectively.

We saw that $INDUS_{BASE}$ outperformed all models of similar sizes, while $INDUS_{SMALL}$ had relatively strong performance.

6.4 Information Retrieval Benchmarks

We evaluated our models on the NASA-IR dataset as well as BEIR Benchmark (Thakur et al., 2021), which consists of 12 retrieval tasks spanning a variety of domains. The BEIR benchmark used the Normalized Cumulative Discount Gain (nDCG@10) (Wang et al., 2013) as their main metric. Table 8 shows the performance of our domain-specific sentence embedding models, along with our baselines. As shown, both of our sentence embedding models significantly outperformed the baselines on the NASA-IR task while still maintaining good performance on several of the BEIR tasks. (We presented results for each BEIR task in Appendix C).

We also measured the average time per query for retrieval on the 4,202 test queries of the natural questions set of BEIR, on a single A100 GPU. This time includes the time to encode the query, corpus, and time to retrieve relevant documents. Notably, $INDUS-RETRIEVER_{SMALL}$ outperformed $INDUS-RETRIEVER_{BASE}$, on both NASA-IR and BEIR, while being about 4.6x faster.

Model	NASA-IR \uparrow	BEIR Avg. \uparrow	Retrieval Time \downarrow
ROBERTa _{BASE}	0.66	0.37	1.20
BGE _{BASE}	0.67	0.52	1.18
$INDUS-RETRIEVER_{BASE}$	0.71	0.41	1.19
MINILM-V2	0.62	0.39	0.24
BGE _{SMALL}	0.66	0.51	0.42
$INDUS-RETRIEVER_{SMALL}$	0.73	0.42	0.26

Table 8: Evaluation results on NASA-IR and BEIR. NASA-IR showed Recall@10 while BEIR reported the average nDCG@10 across all tasks. Retrieval time per query on the NQ task from BEIR, reported in seconds.

7 Conclusions

In this research, we presented INDUS, a constellation of models for use in the science domain. We demonstrated the effectiveness of a custom tokenizer and in-domain data for training high quality encoder models and sentence embedding models. Further, we created smaller versions of the proposed models suitable for applications with latency or resource constraints through state-of-the-art knowledge distillation techniques. For the benefit of the scientific community, we will release the developed models and benchmark datasets on Hugging Face.

References

- Dogu Araci. 2019. *Finbert: Financial sentiment analysis with pre-trained language models*.
- Iz Beltagy, Kyle Lo, and Arman Cohan. 2019. *SciBERT: A pretrained language model for scientific text*. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3615–3620, Hong Kong, China. Association for Computational Linguistics.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. *Language models are few-shot learners*. In *Advances in Neural Information Processing Systems*, volume 33, pages 1877–1901. Curran Associates, Inc.
- Colin B. Clement, Matthew Bierbaum, Kevin P. O’Keeffe, and Alexander A. Alemi. 2019. *On the use of arxiv as a dataset*.

- Arman Cohan, Sergey Feldman, Iz Beltagy, Doug Downey, and Daniel S. Weld. 2020. SPECTER: Document-level Representation Learning using Citation-informed Transformers. In *ACL*.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Matthew Dunn, Levent Sagun, Mike Higgins, V. Ugur Guney, Volkan Cirik, and Kyunghyun Cho. 2017. Searchqa: A new q&a dataset augmented with context from a search engine.
- Anthony Fader, Luke Zettlemoyer, and Oren Etzioni. 2014. Open question answering over curated and extracted knowledge bases. In *Proceedings of the 20th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD '14*, page 1156–1165, New York, NY, USA. Association for Computing Machinery.
- Tianyu Gao, Xingcheng Yao, and Danqi Chen. 2021. SimCSE: Simple contrastive learning of sentence embeddings. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6894–6910, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Yu Gu, Robert Tinn, Hao Cheng, Michael Lucas, Naoto Usuyama, Xiaodong Liu, Tristan Naumann, Jianfeng Gao, and Hoifung Poon. 2021. Domain-specific language model pretraining for biomedical natural language processing. *ACM Trans. Comput. Healthcare*, 3(1).
- Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. 2014. Distilling the Knowledge in a Neural Network. In *NeurIPS Deep Learning Workshop*.
- Zhi Hong, Aswathy Ajith, Gregory Pauloski, Eamon Duede, Kyle Chard, and Ian Foster. 2023. The diminishing returns of masked language models to science.
- Shu Huang and Jacqueline M Cole. 2022. Batterybert: A pretrained language model for battery database enhancement. *J. Chem. Inf. Model.*, page DOI: 10.1021/acs.jcim.2c00035.
- Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. Dense passage retrieval for open-domain question answering. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6769–6781, Online. Association for Computational Linguistics.
- Prannay Khosla, Piotr Teterwak, Chen Wang, Aaron Sarna, Yonglong Tian, Phillip Isola, Aaron Maschiot, Ce Liu, and Dilip Krishnan. 2020. Supervised contrastive learning. In *Advances in Neural Information Processing Systems*, volume 33, pages 18661–18673. Curran Associates, Inc.
- Rodney Kinney, Chloe Anastasiades, Russell Authur, Iz Beltagy, Jonathan Bragg, Alexandra Buraczynski, Isabel Cachola, Stefan Candra, Yoganand Chandrasekhar, Arman Cohan, Miles Crawford, Doug Downey, Jason Dunkelberger, Oren Etzioni, Rob Evans, Sergey Feldman, Joseph Gorney, David Graham, Fangzhou Hu, Regan Huff, Daniel King, Sebastian Kohlmeier, Bailey Kuehl, Michael Langan, Daniel Lin, Haokun Liu, Kyle Lo, Jaron Lochner, Kelsey MacMillan, Tyler Murray, Chris Newell, Smita Rao, Shaurya Rohatgi, Paul Sayre, Zejiang Shen, Amanpreet Singh, Luca Soldaini, Shivashankar Subramanian, Amber Tanaka, Alex D. Wade, Linda Wagner, Lucy Lu Wang, Chris Wilhelm, Caroline Wu, Jiangjiang Yang, Angele Zamarron, Madeleine Van Zuylen, and Daniel S. Weld. 2023. The semantic scholar open data platform.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. 2019. Natural Questions: A Benchmark for Question Answering Research. *Transactions of the ACL*.
- Jinhyuk Lee, Wonjin Yoon, Sungdong Kim, Donghyeon Kim, Sunkyu Kim, Chan Ho So, and Jaewoo Kang. 2019. BioBERT: a pre-trained biomedical language representation model for biomedical text mining. *Bioinformatics*, 36(4):1234–1240.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. BART: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7871–7880, Online. Association for Computational Linguistics.
- Patrick Lewis, Yuxiang Wu, Linqing Liu, Pasquale Minervini, Heinrich Küttler, Aleksandra Piktus, Pontus Stenetorp, and Sebastian Riedel. 2021. PAQ: 65 Million Probably-Asked Questions and What You Can Do With Them. *Transactions of the Association for Computational Linguistics*, 9:1098–1115.
- Zehan Li, Xin Zhang, Yanzhao Zhang, Dingkun Long, Pengjun Xie, and Meishan Zhang. 2023. Towards general text embeddings with multi-stage contrastive learning.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*.

- Kyle Lo, Lucy Lu Wang, Mark Neumann, Rodney Kinney, and Daniel Weld. 2020. [S2ORC: The semantic scholar open research corpus](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4969–4983, Online. Association for Computational Linguistics.
- Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. 2019. [Language models are unsupervised multitask learners](#).
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21(1).
- Pranav Rajpurkar, Robin Jia, and Percy Liang. 2018. [Know what you don't know: Unanswerable questions for squad](#). *CoRR*, abs/1806.03822.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. SQuAD: 100,000+ Questions for Machine Comprehension of Text. In *EMNLP*.
- Nils Reimers and Iryna Gurevych. 2019. [Sentence-BERT: Sentence embeddings using Siamese BERT-networks](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3982–3992, Hong Kong, China. Association for Computational Linguistics.
- Marc Suárez-Calvet, Thomas K Karikari, Nicholas J Ashton, Juan Lantero Rodríguez, Marta Milà-Alomà, Juan Domingo Gispert, Gemma Salvadó, Carolina Minguillon, Karine Fauria, Mahnaz Shekari, Oriol Grau-Rivera, Eider M Arenaza-Urquijo, Aleix Sala-Vila, Gonzalo Sánchez-Benavides, José Maria González-de-Echávarri, Gwendlyn Kollmorgen, Erik Stoops, Eugeen Vanmechelen, Henrik Zetterberg, Kaj Blennow, José Luis Molinuevo, null null, Annabella Beteta, Raffaele Cacciaglia, Alba Cañas, Carme Deulofeu, Irene Cumpido, Ruth Dominguez, Maria Emilio, Carles Falcon, Sherezade Fuentes, Laura Hernandez, Gema Huesa, Jordi Huguet, Paula Marne, Tania Menchón, Grégory Operto, Albina Polo, Sandra Pradas, Anna Soteras, Marc Vilanova, and Natalia Vilor-Tejedor. 2020. [Novel tau biomarkers phosphorylated at t181, t217 or t231 rise in the initial stages of the preclinical alzheimer's continuum when only subtle changes in aβ; pathology are detected](#). *EMBO Molecular Medicine*, 12(12):e12921.
- Nandan Thakur, Nils Reimers, Andreas Rücklé, Abhishek Srivastava, and Iryna Gurevych. 2021. [Beir: A heterogenous benchmark for zero-shot evaluation of information retrieval models](#).
- James Thorne, Andreas Vlachos, Christos Christodoulopoulos, and Arpit Mittal. 2018. [FEVER: a large-scale dataset for fact extraction and VERification](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 809–819, New Orleans, Louisiana. Association for Computational Linguistics.
- Robert Tinn, Hao Cheng, Yu Gu, Naoto Usuyama, Xiaodong Liu, Tristan Naumann, Jianfeng Gao, and Hoifung Poon. 2023. Fine-tuning large neural language models for biomedical natural language processing. *Patterns*, 4(4).
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. 2023. [Llama: Open and efficient foundation language models](#).
- Aashka Trivedi, Takuma Udagawa, Michele Merler, Rameswar Panda, Yousef El-Kurdi, and Bishwaranjan Bhattacharjee. 2023. Neural architecture search for effective teacher-student knowledge transfer in language models. *arXiv preprint arXiv:2303.09639*.
- Takuma Udagawa, Aashka Trivedi, Michele Merler, and Bishwaranjan Bhattacharjee. 2023. [A comparative analysis of task-agnostic distillation methods for compressing transformer language models](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing: Industry Track*, pages 20–31, Singapore. Association for Computational Linguistics.
- Aaron van den Oord, Yazhe Li, and Oriol Vinyals. 2019. [Representation learning with contrastive predictive coding](#).
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. [Attention is all you need](#). In *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc.
- Nicholas Walker, Amalie Trewartha, Haoyan Huo, Sanghoon Lee, Kevin Cruse, John Dagdelen, Alexander Dunn, Kristin Persson, Gerbrand Ceder, and Anubhav Jain. 2021. The impact of domain-specific pre-training on named entity recognition tasks in materials science. *Available at SSRN 3950755*.
- Liang Wang, Nan Yang, Xiaolong Huang, Binxing Jiao, Linjun Yang, Daxin Jiang, Rangan Majumder, and Furu Wei. 2022. [Text embeddings by weakly-supervised contrastive pre-training](#).
- Wenhui Wang, Hangbo Bao, Shaohan Huang, Li Dong, and Furu Wei. 2021. [MiniLMv2: Multi-head self-attention relation distillation for compressing pre-trained transformers](#). In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 2140–2151, Online. Association for Computational Linguistics.

Yining Wang, Liwei Wang, Yuanzhi Li, Di He, and Tie-Yan Liu. 2013. [A theoretical analysis of ndcg type ranking measures](#). In *Proceedings of the 26th Annual Conference on Learning Theory*, volume 30 of *Proceedings of Machine Learning Research*, pages 25–54, Princeton, NJ, USA. PMLR.

Shijie Wu, Ozan Irsoy, Steven Lu, Vadim Dabravolski, Mark Dredze, Sebastian Gehrmann, Prabhajan Kam-badur, David Rosenberg, and Gideon Mann. 2023. [Bloomberggpt: A large language model for finance](#).

Shitao Xiao, Zheng Liu, Yingxia Shao, and Zhao Cao. 2022. [RetroMAE: Pre-training retrieval-oriented language models via masked auto-encoder](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 538–548, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.

Shitao Xiao, Zheng Liu, Peitian Zhang, and Niklas Muennighoff. 2023. [C-pack: Packaged resources to advance general chinese embedding](#).

Jiahao Xu, Wei Shao, Lihui Chen, and Lemao Liu. 2023. [DistillCSE: Distilled contrastive learning for sentence embeddings](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 8153–8165, Singapore. Association for Computational Linguistics.

Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. 2018. [HotpotQA: A dataset for diverse, explainable multi-hop question answering](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2369–2380, Brussels, Belgium. Association for Computational Linguistics.

A Sentence Embedding Training Data

Table 10 shows the various data sources used for training embedding models. All data is presented in the form of text-pairs, where each item in the pair may be a sentence or a paragraph. In the table, Data Format denotes s2p for sentence-to-paragraph mappings, s2s for sentence-to-sentence mappings, and p2p for paragraph-to-paragraph mappings. We used about 360 million pairs for training and used in-batch negatives.

B Ablation Study: Stage-wise Distillation for Embedding Model

For the distilled embedding models, we find that stage-wise distillation does not benefit performance as much as a one-step process, combining all the supervised and unsupervised data. As shown in Table 9, the stage-wise approach underperformed the one-stage approach by 1 percentage point for both NASA-QA and on BEIR.

Model	Training	NASA-IR	BEIR Avg.
INDUS-RETRIEVER _{SMALL}	One-Stage	0.73	0.42
INDUS-RETRIEVER _{SMALL}	Stagewise	0.72	0.41

Table 9: Ablation Study: Evaluation results on NASA-QA and BEIR. NASA-QA showed Recall10 while BEIR reported nDCG10.

C Complete Results on BEIR Benchmark

Table 11 shows the per-dataset results on the BEIR tasks.

Dataset	Num. Pairs	Data Category	Data Format
StackOverflow [†]	18562443	Title-Body	s2p
StackExchange Math [†]	2201906	Title-Body	s2p
S2ORC [title - abstract] (Lo et al., 2020)	41769185	Title-Body	s2p
S2ORC Citation Pairs [Abstracts] (Lo et al., 2020)	52603982	Title-Body	p2p
StackExchange [title - body] [†]	5415570	Title-Body	s2p
Wikipedia (Fader et al., 2014)	6458670	Title-Body	s2p
Arxiv (Clement et al., 2019)	2358545	Title-Body	s2p
NASA ADS [title - abstract] (§2)	2633240	Title-Body	s2p
PubMed [title - abstract] (§2)	24001387	Title-Body	s2p
PMC [title - abstract] (§2)	2585537	Title-Body	s2p
StackExchange Duplicate Questions [title-body - title-body] [†]	250460	Duplicate Questions	p2p
StackExchange Duplicate Questions [body - body] [†]	250519	Duplicate Questions	p2p
StackExchange Duplicate Questions [title - title] [†]	304525	Duplicate Questions	s2s
WikiAnswer Pairs (Fader et al., 2014)	77427422	Duplicate Questions	s2s
Specter Pairs (Cohan et al., 2020)	684100	Citation Pairs	s2s
S2ORC Citation Pairs [Titles] (Lo et al., 2020)	52603982	Citation Pairs	s2s
SQuAD (Rajpurkar et al., 2016)	87599	Question Answers	s2p
NQ (Kwiatkowski et al., 2019)	100231	Question Answers	s2p
SearchQA (Dunn et al., 2017)	582261	Question Answers	s2p
StackExchange [title - answer] [†]	4067139	Question Answers	s2p
StackExchange [title-body - answer] [†]	187195	Question Answers	p2p
PAQ (Lewis et al., 2021)	64371441	Question Answers	s2p
FEVER (Thorne et al., 2018)*	109810	Fact Verification	s2p
HotpotQA (Yang et al., 2018)*	85000	Question Answering	s2p

Table 10: Training Data for Embedding Models. The training data totals to around 360M pairs. Data Format denotes s2p for sentence-to-paragraph mappings, s2s for sentence-to-sentence mappings, and p2p for paragraph-to-paragraph mappings. [†]Downloaded from https://huggingface.co/datasets/flax-sentence-embeddings/stackexchange_xml. *Only used for Distillation.

Model	BEIR Eval												
	TREC-Covid	NFCorpus	NQ	HotPotQA	FiQA	ArguaAna	Touche	DBPedia	Scidocs	FEVER	Climate FEVER	SciFact	AVG. BEIR
ROBERTa _{BASE}	0.47	0.30	0.54	0.34	0.38	0.52	0.18	0.25	0.22	0.46	0.14	0.67	0.37
BGE _{BASE}	0.78	0.37	0.54	0.73	0.41	0.64	0.26	0.41	0.22	0.86	0.31	0.74	0.52
INDUS-RETRIEVER _{BASE}	0.56	0.32	0.54	0.49	0.36	0.54	0.17	0.31	0.21	0.56	0.14	0.74	0.41
MINILM-V2	0.47	0.32	0.44	0.47	0.35	0.50	0.17	0.32	0.22	0.52	0.25	0.65	0.39
BGE _{SMALL}	0.76	0.34	0.50	0.70	0.40	0.60	0.26	0.40	0.21	0.87	0.32	0.71	0.51
INDUS-RETRIEVER _{SMALL}	0.55	0.31	0.53	0.48	0.29	0.50	0.21	0.33	0.23	0.61	0.23	0.71	0.42

Table 11: Evaluation results BEIR.